



# Datasheet

# SRL3115MF


## Battery

SRL3115MF	12v	115Ah
-----------	-----	-------

The rechargeable batteries are lead-calcium acid systems.

### General Features

- Labyrinth lid technology and spark arrestor which allows emissions to be safely exhausted externally from the equipment with added protection against gas combustion within the battery.
- Visual indicator to check the batteries charge and acid levels.
- Absolutely maintenance free – fit & forget.
- NCC Verified – Class C – 70 Cycles.

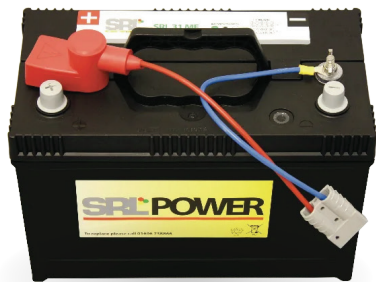

For more information about Batteries,  
Visit [srltraffic.ie](http://srltraffic.ie) or call us on **01-5384971**.

PERFORMANCE	
Voltage	12

DIMENSIONS & WEIGHT	
Length (mm)	328
Width (mm)	171
Height (mm)	215
Total Height (mm)	237
Weight Kg (+/- 3%)	23.45
Terminal Style	T1 & T8
Terminal Layout	1
Separator	PE GM Enveloping

HANDLE	
Strap Type	COS (Cast-On-Strap)
Strap Alloy	Pb-Sb

LID	
Type	Sealed Flat
Positive Plate - Type	Expanded
Positive Plate - Alloy	Pb-Ca
Negative Plate - Type	Expanded
Negative Plate - Alloy	Pb-Ca

Specifications	
Base Hold Down	N
CCA (EN)	Not Applicable
Ah Capacity (C20)	115
Reserve Capacity (Min)	0
Engine Starts	Not Applicable
Charge Acceptance (A)	11.0